


W/ RAISED MEDIAN

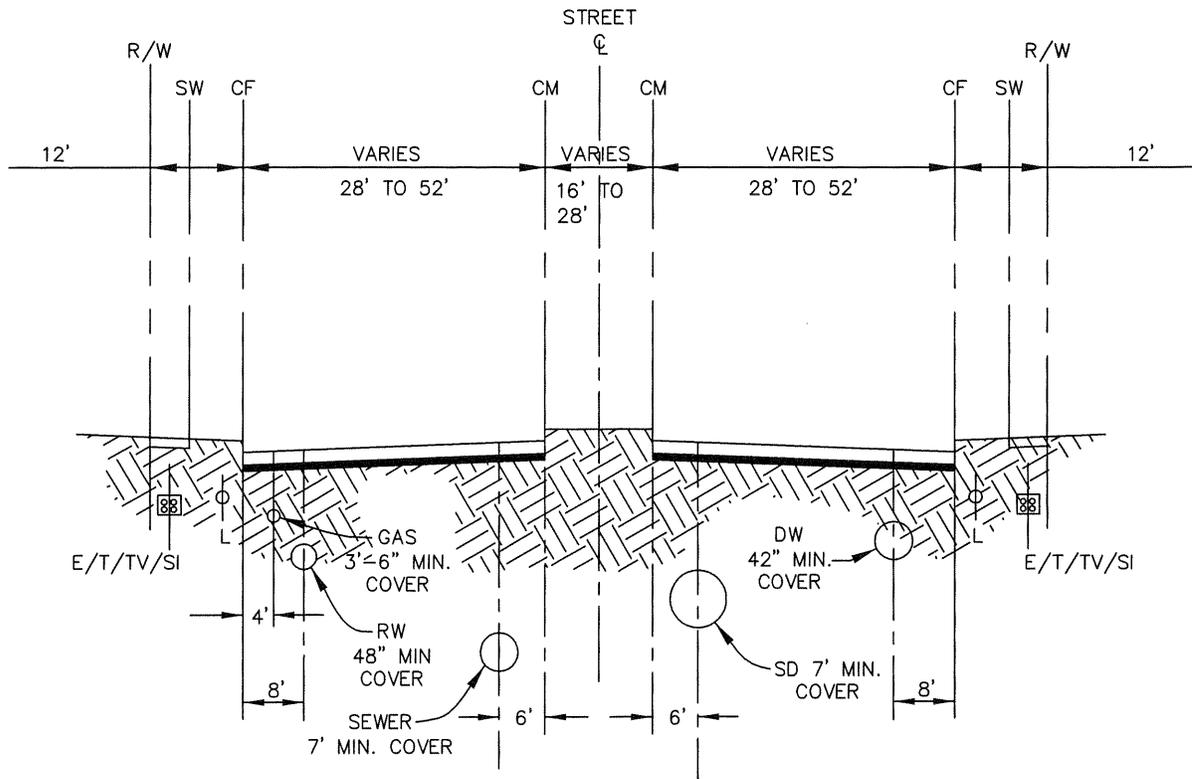

TYP. UTILITY LAYOUT (A)
(SECTION LOOKING NORTH AND WEST)

NTS

- CM = CURB MEDIAN
- CF = CURB FACE
- SW = SIDEWALK
- R/W = RIGHT OF WAY
- DW = DOMESTIC WATER
- G = GAS
- L = STREET LIGHTING
- RW = RECLAIMED WATER
- S = SEWER
- SD = STORM DRAIN
- T = TELEPHONE/FIBEROPTIC
- TV = CABLE TELEVISION
- E = ELECTRICAL
- SI = SIGNAL INTERCONNECT

NOTE:

1. PROVIDE 1' MIN. CLEARANCE AT UTILITY CROSSINGS
2. BETWEEN CURBS, COVER FOR LATERALS SHALL NOT BE LESS THAN 30" BELOW ROADWAY SURFACE.
3. MIN. SEPARATION BETWEEN WATER AND SEWER SHALL BE PER CITY STANDARD DRAWING NUMBER 4001.
4. VARIATIONS FROM STANDARD WILL REQUIRE PRIOR APPROVAL FROM CITY ENGINEER.
5. SEE STANDARD DRAWING 5203 FOR CURB RETURN CLEAR ZONES.



| | | | |
|-------------------------|-------------|---------------|------------|
| APPROVED BY: | | 24079 3/30/07 | |
| <i>John P. Sullivan</i> | | RCE | DATE |
| RECOMMENDED: | | 44485 3/30/07 | |
| <i>Kevin M. Jones</i> | | RCE | DATE |
| REV | DESCRIPTION | BY | APP'D DATE |
| | | | |

CITY OF ONTARIO

UTILITY LOCATIONS FOR
STANDARD DIVIDED
STREET SECTIONS

STANDARD
DRAWING
NUMBER

1302