



PLAN VIEW

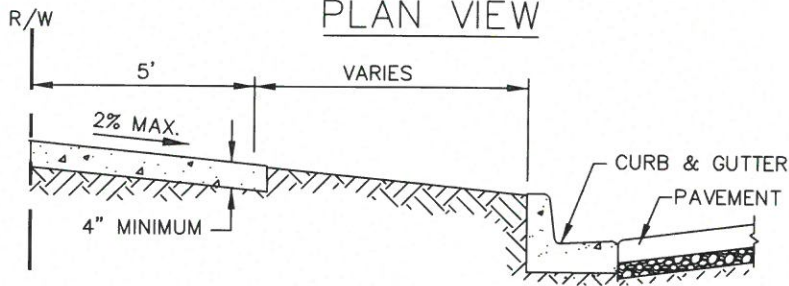

SECTION A-A

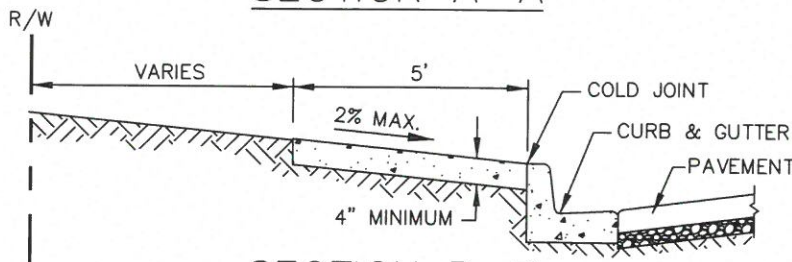

SECTION B-B

NOTES

- ① CONCRETE SHALL BE CLASS 520-C-2500 PER SECTION 201 STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION, CURED WITH TYPE 1-D CURING COMPOUND.
- ② SCORE LINES SHALL BE 5' ON CENTER.
- ③ WEAKENED PLANE JOINTS SHALL BE AT 10' ON CENTER MAXIMUM. SEE DRAWING ABOVE FOR DISTANCE FROM CURB RETURN AREA TO FIRST JOINT.
- ④ REFER TO STANDARD DRAWING NO. 1106 FOR CURB RETURN REQUIREMENTS.
- ⑤ SIDEWALK LOCATION SHALL BE ADJACENT TO PUBLIC RIGHT-OF-WAY (SECTION A-A).
SIDEWALK ADJACENT TO CURB (SECTION B-B) REQUIRES APPROVAL FROM CITY ENGINEER.
- ⑥ SIDEWALK BACKFILL SHALL BE COMPACTED TO 90% MINIMUM.



| | | | | | |
|----------------------------------|-------------|--------------------|-------|-------|---------|
| APPROVED BY: | | <i>[Signature]</i> | | 62809 | 7-29-19 |
| KHOI DO, CITY ENGINEER | | RCE | DATE | | |
| RECOMMENDED: | | <i>[Signature]</i> | | 70990 | 7/22/19 |
| BRYAN LIRLEY, PRINCIPAL ENGINEER | | RCE | DATE | | |
| REV | DESCRIPTION | BY | APP'D | DATE | |

CITY OF ONTARIO

SIDEWALK

STANDARD DRAWING NUMBER

1209